


SPC wall panels

TECHNICAL DATA SHEET

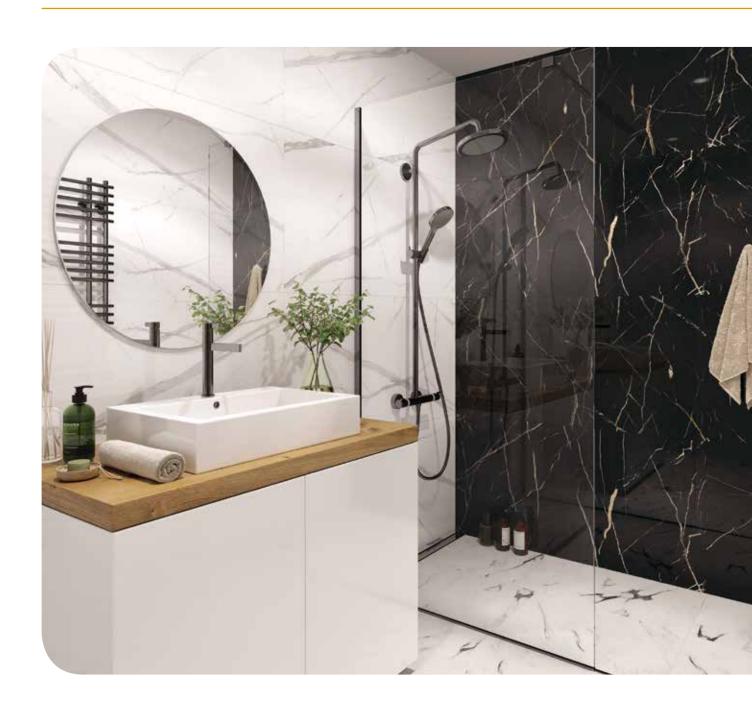

Profile Type	Walls Panels SPC	
Material	Stone polymer composite	
Lenght x width	30 cm x 60 cm / 120 cm x 60 cm	
Thinkness	4 mm	
Coverage area/ pack	30 cm x 60 cm: 2,34 m² / 120 cm x 60 cm: 2,88 m²	
Packing	30 cm x 60 cm: 13 szt. (2,34 m²) / package 120 cm x 60 cm: 4 szt. (2,88 m²) / package	
Storage	The product should be stored in covered rooms, out of the reach of heating devices and direct sunlight. In conditions that protect the panels against contamination, deformation and mechanical damage.	
Tools	Use an upholstery knife or a saw for cutting.	
Joint	Tongue-and-groove joint.	
Installation temperature	Before installation, the panels should be left in the room where they will be installed in order to equalize their temperature with the ambient temperature.	
Important installation information	 the product can be installed in wet rooms (kitchen, bathroom), provided that it is sealed with silicone do not install in places exposed to an open flame (gas stove) assembly with glue - smooth, non-shedding substrate, glue based on hybrid polymer 	
Maintenance	Clean with a damp cloth or mild detergent. Do not leave liquid stains to dry. Vigorous scrubbing and the use of strong cleaning agents may damage the panel surface or discolor the panel. Do not use solvents, acids or liquids based on these ingredients for cleaning. Do not clean with sharp and coarse cloths, sponges and brushes. Do not leave cleaning agents on the surface, rinse thoroughly with water after cleaning, leaving cleaning agents on the surface may cause discoloration.	
Environmental characteristics	The product is 100% recyclable	

Essential characteristics	Performance properties	Assessment methods	
Impact resistance	Not less than 1J (23,01)		
Release of hazardous substances	NPD	PN-EN	
Reaction to fire	B-s2;d0	13245-2:2009 / AC: 2010	
Fastening strenght	See: assembly instructions		















DIY INSTALLATION



QUICK TO INSTALL